


		
		V1.0




	L*W*H=310*98*78mm	
-r*^&Í- ; (&&Š"•"9 ; 5yOü £_ ; ^e^ KúMþ ;69&9="â ; ;,D/;,-' ; *^ g_çdç ; EÐAð ;3!(D4!š ;Oü=•`ÆFþ ;D / Ü1£ ;WK4>1f;Ô ;= 4><vED ;^,e1<ve1JH(XÅED2 Wd H <		
6+XÃ7; e<ð&2- "BKr HD4HÐ1•6 eO k"÷AG6B1?6 o 6)MÎ "BKr efa1x Åo .-# "BKr(Ef#W,ä! "Ðo .-^ÚWK g_ç1 _ç! ~D' ;(!5 ; í48o .- ä ú T4,. # Õ ¹_f1 < "BKr ÜDX*ø !#À1•6."Á4o^ÚWK5ó4¯Ef6B!(o äGm Ü 9*¡162Ĭ š5ÿ4¯ ;5ÿ rEf !#À <		
		4† õKz&Šo! !#ÀXÃ7; e
	LGL	2020-s 2 6 20 4ä
	LZHJ	2020-s 2 6 20 4ä
	WYM	2020-s 2 6 20 4ä

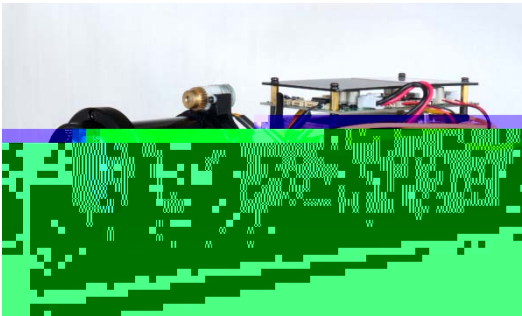

	*^ g&ŠMj(>¿ HWd H?n
	IR-940-3 000-M - 00
	3000 Kr
	HM£!ÿ" >¿ H%g
	940±10nm
	Class 4Bo FDA ; IEΩ
	5ÿ+ XÑ-¥4ð300m
	D4!§# :d"×@%o 0.3oe35°^ÝMì"ĩ[
	M10 HÑo ^ÛXÑÐXÑo
	21±2W
	20±2W
	^ÛXÑ0.3°o!6 4G\ÜH° N3000 Kro H4•Eó.f 16 Kr
	4ß H2^ ;4ß%ifò ;4ßf !§ ;4ß1•!§ ;4ß4b4•Ef.-_ d[>¿ H!ÿ" !(1• 6.o H4•&F!ÿ ;D:\'_ _
	DC24V±10%
	2.0A±0.3A
	o#60W
	RS485 ; 1"â TTL; 1J!§2!5"î_ (m×Z£9600bps)
	Pelco_D
	-35qàoe+55qà

	-40qàoe+85qà
	o%2000H
	L*W*H:310*98*78mm
	o#1.70kg
	4s69RoHSZ£ZÀ

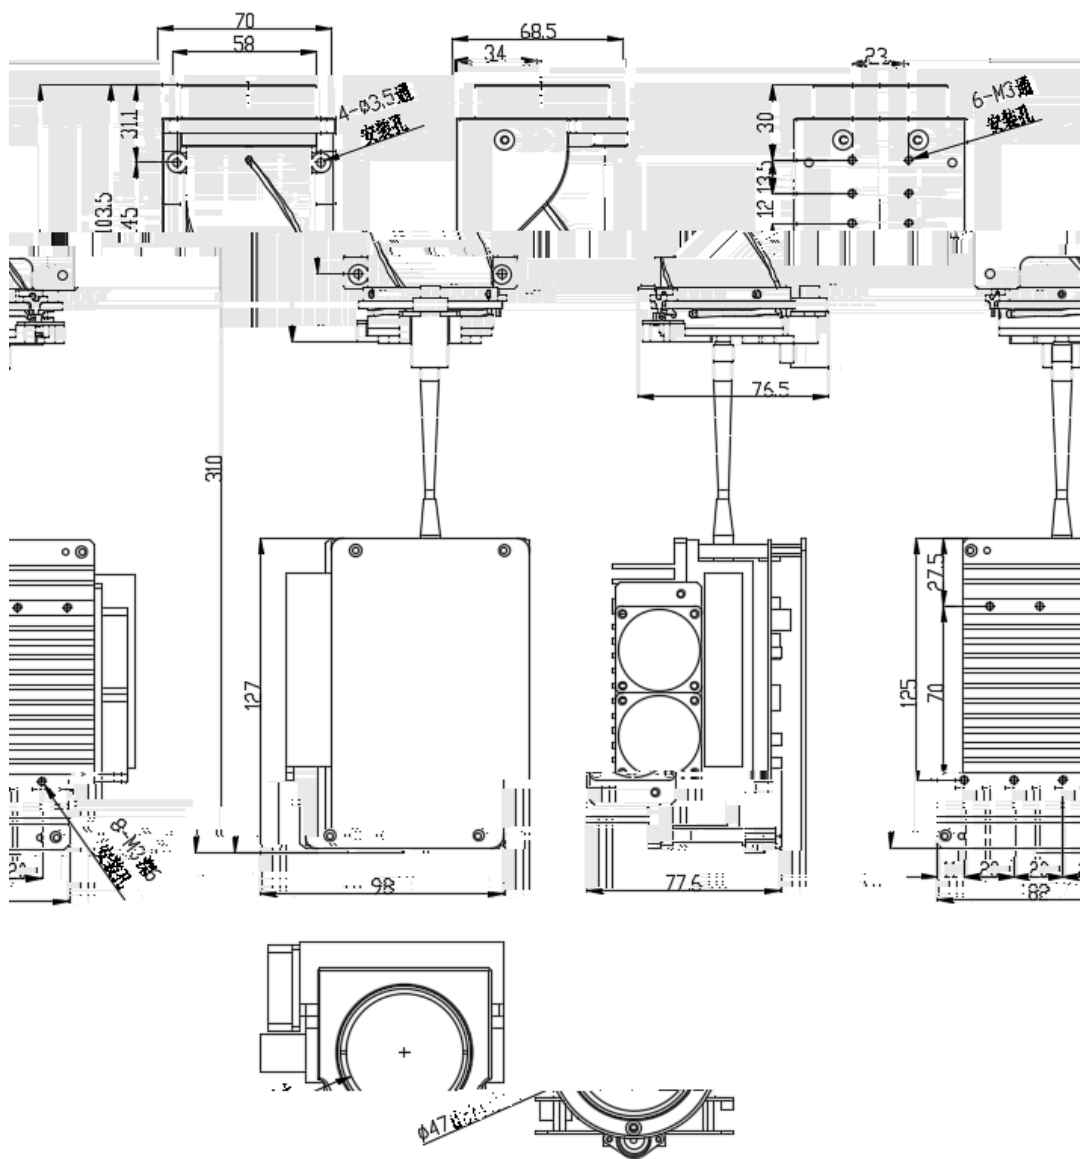

mm

